


标准加长锥柄麻花钻(GB1438.3)

Standard extended twist drill with taper-shank (GB1438.3)

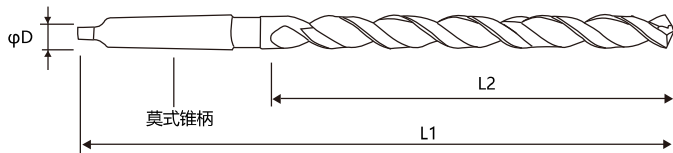

○ 不适合加工 ● 适合加工 ● 非常适合

 材质6542	 118°	P	M	K	N	S	H
		钢	不锈钢	铸铁	非铁材料	高温合金、钛合金	高硬度



直径 (D)	全长 (L1)	刃长 (L2)	MORSE	直径 (D)	全长 (L1)	刃长 (L2)	MORSE	直径 (D)	全长 (L1)	刃长 (L2)	MORSE
6	225	145	1	22	335	235	2	46	460	310	4
6.5	230	150	1	22.5	340	240	2	47	460	310	4
7	235	155	1	23	340	240	2	48	470	320	4
7.5	235	155	1	23.5	360	240	3	49	470	320	4
8	240	160	1	24	365	245	3	50	470	320	4
8.5	240	160	1	24.5	365	245	3	51	550	350	5
9	245	165	1	25	365	245	3	52	550	350	5
9.5	245	165	1	25.5	375	255	3	53	550	350	5
10	250	170	1	26	375	255	3	54	550	350	5
10.5	250	170	1	26.5	385	265	3	55	550	350	5
11	255	175	1	27	385	265	3	56	550	350	5
11.5	255	175	1	27.5	385	265	3	57	550	350	5
12	260	180	1	28	385	265	3	58	550	350	5
12.5	260	180	1	28.5	395	275	3	59	550	350	5
13	260	180	1	29	395	275	3	60	550	350	5
13.5	265	185	1	29.5	395	275	3	61	550	350	5
14	265	185	1	30	395	275	3	62	550	350	5
14.5	290	190	2	31	400	280	3	63	550	350	5
15	290	190	2	32	420	270	4	64	550	350	5
15.5	295	195	2	33	420	270	4	65	550	350	5
16	295	195	2	34	420	270	4	66	550	350	5
16.5	300	200	2	35	430	280	4	67	550	350	5
17	300	200	2	36	430	280	4	68	550	350	5
17.5	305	205	2	37	430	280	4	69	550	350	5
18	305	205	2	38	430	280	4	70	550	350	5
18.5	310	210	2	39	450	300	4	71	550	350	5
19	310	210	2	40	450	300	4	72	550	350	5
19.5	320	220	2	41	450	300	4	73	550	350	5
20	320	220	2	42	450	300	4	74	550	350	5
20.5	330	230	2	43	450	300	4	75	550	350	5
21	330	230	2	44	450	300	4	76	550	350	5
21.5	335	235	2	45	450	300	4	77-80	650	400	5