


/// DIN338直柄麻花钻

DIN338 Twist drill with straight shank

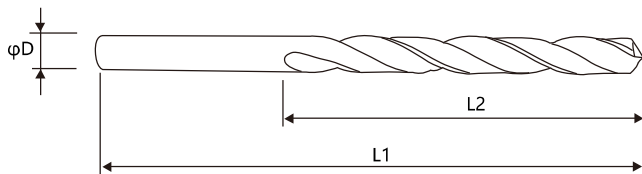

○ 不适合加工 ● 适合加工 ● 非常适合

		双后角自定心	P	M	K	N	S	H
材质M35/6542/4341	118/135°		钢	不锈钢	铸铁	非铁材料	高温合金、钛合金	高硬度

● ● ● ● ○ ●

规格 (D)	全长 (L1)	刃长 (L2)
0.5	22	6
0.6	24	7
0.7	28	9
0.8	30	10
0.9	32	11
1.0	34	12
1.1	36	14
1.2	38	16
1.3	40	18
1.4	40	18
1.5	43	20
1.6	43	20
1.7	46	22
1.8	46	22
1.9	46	24
2.0	49	24
2.1	49	24
2.2	53	27
2.3	53	27
2.4	57	30
2.5	57	30
2.6	57	30
2.7	61	33
2.8	61	33
2.9	61	33
3.0	61	33

规格 (D)	全长 (L1)	刃长 (L2)
3.1	65	36
3.2	65	36
3.3	65	36
3.4	70	39
3.5	70	39
3.6	70	39
3.7	70	39
3.8	75	43
3.9	75	43
4.0	75	43
4.1	75	43
4.2	75	43
4.3	80	47
4.4	80	47
4.5	80	47
4.6	80	47
4.7	80	47
4.8	86	52
4.9	86	52
5.0	86	52
5.1	86	52
5.2	86	52
5.3	86	52
5.4	93	57
5.5	93	57
5.6	93	57
5.7	93	57
5.8	93	57
5.9	93	57

规格 (D)	全长 (L1)	刃长 (L2)
6.0	93	57
6.1	101	63
6.2	101	63
6.3	101	63
6.4	101	63
6.5	101	63
6.6	101	63
6.7	101	63
6.8	109	69
6.9	109	69
7.0	109	69
7.1	109	69
7.2	109	69
7.3	109	69
7.4	109	69
7.5	109	69
7.6	117	75
7.7	117	75
7.8	117	75
7.9	117	75
8.0	117	75
8.1	117	75
8.2	117	75
8.3	117	75
8.4	117	75
8.5	117	75
8.6	125	81
8.7	125	81
8.8	125	81

[illegible]